



All the patents are held accountable counterfeiting.

Features



- DC uninterruptible power supply, parallel connection to DC bus
- Convection cooled
- **Din Rail/ Screw Mounting Dual Purpose**
- Easy mounting (one-step installation)
- UPS Design
- Battery Discharge Protection with Low voltage
- 3A Charge
- No need to replace internal fuse after short protection
- Battery Reverse Polarity Protection
- DC Bus, Battery Status LED, Relay Output Contact

DIMENSIONS:100(H)*110(D)*60(W)mm
WEIGHTS: 400g

Detail specifications

Model	Lead acid battery	Power source	Battery low voltage protecton	Max. battery output current	Battery output voltage
UPS30-24	24V	27.6V	20.5V	30A	20.5~27.6V

LED, Relay and Battery Signal Instrustions


- DC Power Line OK: Relay is short circuit, green LED is on when DC voltage is 20.5V~27.6V.
- Battery Failure: Battery fails, relay is short circuit when battery voltage is below 20.5V.
- Battery Discharge: Relay is short circuit, blue LED is on when battery charging current is greater than 2A.
- Battery Signal: Battery signal is 10V when battery voltage is 27.6V; Battery signal is 0V when battery voltage is 0V.
- When powered by battery and the current is greater than 2A, the buzzer will alarm.
- Maximum relay contact current is 1A (30V).

Application Circuit 1

Provide backup after AC failure.

REIGN POWER'S SWITCHING POWER SUPPLY

REIGN POWER'S UPS SERIES

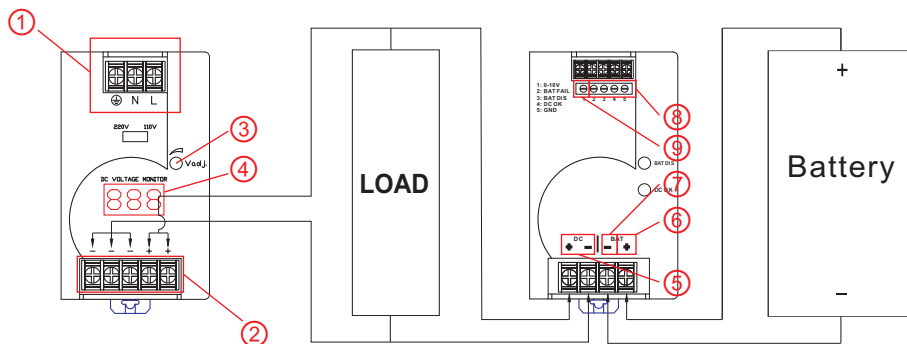

No.	Description
①	100-240VAC input
②	DC output
③	Output voltage control
④	Output voltage display
⑤	DC input
⑥	Battery positive terminal
⑦	Battery negative terminal
⑧	Relay terminals
⑨	Battery Proportional Signal

1.Reign Power reserve the right to change specifications at any time without notice.





All the patents are held accountable counterfeiting.

CE Standards

EN 55032, EN 55035,
EN 61000-3-2, EN 61000-3-3,
EN 61000-4-2, EN 61000-4-3,
EN 61000-4-4, EN 61000-4-5,
EN 61000-4-6, EN 61000-4-8,
EN 61000-4-11

Safety Standards

 UL 62368 Meet
 CE Marking

Environments

Operating Temperature	-15 ~ 50°C, Ambient
Operating Humidity	20 ~ 95% RH, No Condensing
Storage Temperature	-20 ~ 85°C, Ambient
Vibration	2G, 10~500Hz, 3 axes

1.Reign Power reserve the right to change specifications at any time without notice.