



All the patents are held accountable counterfeiting.

Features



Green Power

- Standard/Din Rail Mounting Dual Purpose
- Easy mounting (one-step installation)
- No-load Consumption is lower than 0.5W (No Display)
- Comply with High Efficiency Power 80Plus Criterion
- Comply with 2010. Energy Conservation Power Erp Regulation
- “ Output Voltage Monitor ” Display (Optional)
- Convection cooled high reliability
- 100% burn-in test
- 2 years warranty
- Output modify range: 3V~200VDC

DIMENSIONS:100(H)\*83(D)\*49(W)mm

WEIGHTS: 365g

General specifications

INPUT

Input range 90~132/180~264VAC(Selectable)  
220~380VDC

Input frequency 47~63Hz

Max. I/P current / Inrush current (25°C) 2.03A/20A@110VAC  
1.06A/40A@220VAC

OUTPUT

Hold-up time 13ms

Short protection Autorecovery

Over load protection Automatic power limited

Optional 5V/3A AUX output  
for models which output voltage lower than 40VDC

Detail specifications

100 Watts

MODEL	O/P Volt Adj. ± %	Load(Current) <sup>1</sup>			Ripple & Noise <sup>4</sup>	Line REG. <sup>2</sup>	Load REG. <sup>3</sup>	Efficiency <sup>5</sup>	O.V.P
		Min.	Rated	Max.					
LP1100D-12M	V : +12V ±10%	0A	8.3A	8.3A	120mV	±1%	±1%	85% Ref.	17.1 ~ 18.9V
LP1100D-24M	V : +24V ±10%	0A	4.2A	4.2A	240mV	±1%	±1%	86% Ref.	31.4 ~ 34.7V
LP1100D-48M	V : +48V ±10%	0A	2.1A	2.1A	480mV	±1%	±1%	87% Ref.	64.6 ~ 71.4V
▲● LP2100D3M	V1 : +24V ±10% V2 : +12V	0A 0A	3A 1.5A	4.2A 2.5A	240mV 80mV	±1% ±1%	±1% ±1%	86% Ref.	31.4 ~ 34.7V 15 ~ 18V
▲● LP2100D4M	V1 : +12V ±10% V2 : -12V	0A 0A	7.65A -0.65A	8.3A -0.65A	120mV 80mV	±1% ±1%	±2% ±1%	85% Ref.	17.1 ~ 18.9V -15 ~ -18V
▲● LP2100D5M	V1 : +48V ±10% V2 : +24V	0A 0A	1.1A 1A	2.1A 1A	480mV 80mV	±1% ±1%	±1% ±1%	87% Ref.	64.6 ~ 71.4V 31.4 ~ 34.7V
▲● LP2100D6M	V1 : +24V ±10% V2 : -24V	0A 0A	3.8A -0.4A	4.2A -0.4A	240mV 80mV	±1% ±1%	±1% ±1%	86% Ref.	31.4 ~ 34.7V -31.4 ~ -34.7V

Please Choose Fit Function,And Fill In The Blank With Suitable Words.

Order Model:LP1100D-24M

Optional Function:

Terminal Block: " " : PCB Barrier Terminal Block

Monitor: " " : No Monitor

Type: " " : No Display Function

"D" : Monitor Display

"A" : Output Voltage Display



All the patents are held accountable counterfeiting.

### CE Standards

EN 55032, EN 55035,  
EN 61000-3-3, (EN 61000-4-2,  
EN 61000-4-3, EN 61000-4-4,  
EN 61000-4-5, EN 61000-4-6,  
EN 61000-4-8, EN 61000-4-11)  
LVD: EN 62368-1

### Safety Standards



UL 508 APPROVAL



CE Marking

### Environments

Operating Temperature	-15 ~ 50°C, Ambient
Operating Humidity	20 ~ 90% RH, No Condensing
Storage Temperature	-20 ~ 85°C, Ambient
Vibration	2G, 10~500Hz, 3 axes


### NOTE

1. Each output can provide up to maximum load, but total load can not exceed rated output power.
2. Line regulation is measured from low line to high line at rated load.
3. Load regulation is measured from 20% to 100% of rated load at 220VAC input.
4. Ripple & Noise are measured with 20MHz oscilloscope at 220VAC by using a 20cm long 12" twisted pair-wire with a 0.1uF/630V metal capacitor & a 47uF electrolytic capacitor parallel on the test point.
5. Efficiency is measured at rated load and 220VAC input.
6. Hold-up time is measured at rated load and 220VAC input.
7. With ● are CE safety approval, but no UL safety approval.
8. With ▲ are no Monitor Display ONLY.
9. For output voltage monitor display models, no-load power consumption is 1.5W and no Energy Conservation Power Erp Regulation.
10. Output Voltage Adjustable is measured on 5% of rated load.
11. The product uses metal enclosure for cooling. To ensure product lifespan, a clearance of at least 1 cm at the side of the product, 2 cm at top and bottom of the product should be maintained when installing.
12. Reign Power reserve the right to change specifications at any time without notice.



All the patents are held accountable counterfeiting.

Mechanical Details

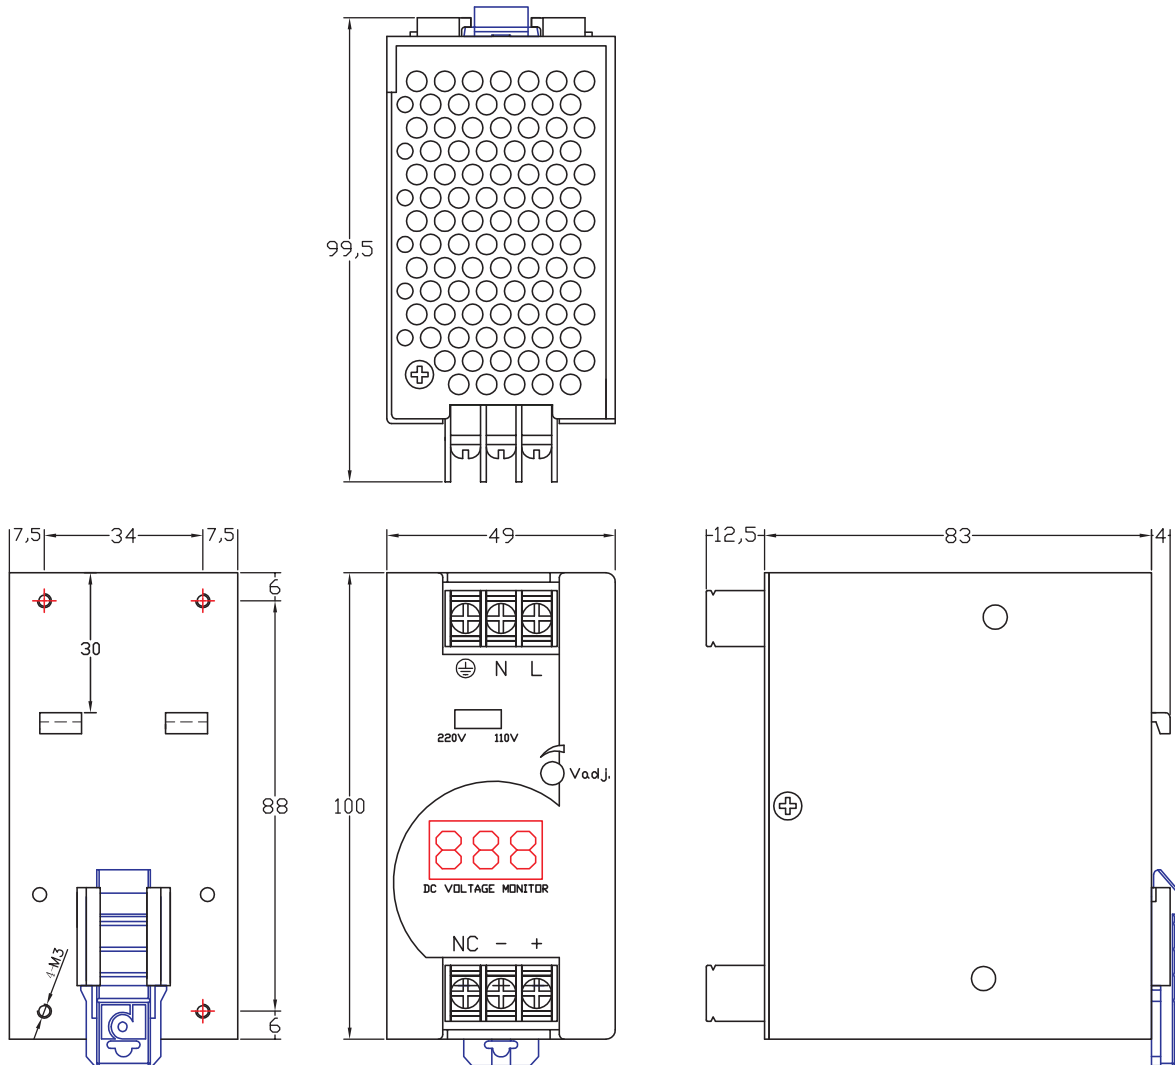

Panel Designation

CASE NO. : CS035DR  
UNIT : mm  
DIMENSION : 100(H)\*83(D)\*49(W)  
MATERIAL : ALUMINUM  
COLOR : ORIGINAL ALUMINUM

Symbol	Description
L	Line Terminal Of AC Input (No Polarity At DC Input)
N	Neutral Terminal Of AC Input (No Polarity At DC Input)
⊕	Grounding (Earth)
+	DC Positive Output Terminal
-	DC Negative Output Terminal
NC	No Output Terminal
DC Voltage Monitor	Display Output Voltage
V adj.	Potentiometer For Output Voltage



All the patents are held accountable counterfeiting.

Circuit Block Diagram

Oscillation frequency: 68KHz

