



## Features



DIMENSIONS : 151(L) x 99(W) x 35(H)mm  
WEIGHTS: 500g

- Functioned as UPS when connecting external battery
- Battery Reverse Protection
- Battery Low Voltage Protection (Automatic Disconnect)
- Signal of AC Power Cut-off (Battery Powered)
- Convection cooled
- 2 years Warranty

## General specifications

### INPUT

**Input range** 90~264VAC  
127~380VDC

**Input frequency** 47~63Hz

**Max. I/P current / Inrush current (25° C)** 2.5A/20A@110VAC  
1.0A/40A@220VAC

### OUTPUT

**Hold-up time** 13mS

**Short protection** Autorecovery

**Overload protection** Automatic power limited

## Detail specifications

### 100 Watts

MODEL	O/P Volt Adj. ± %	Battery Voltage	Load(Current) <sup>1</sup>			Ripple & Noise <sup>4</sup>	Line REG. <sup>2</sup>	Load REG. <sup>3</sup>	Efficiency <sup>5</sup>
			Min.	Rated	Max.				
RCB1100-12F	V1: +13.8V ±10% B+: +13.8V-----	12V	0A 0A	7.25A 0.5A	7.25A ----	120mVp-p ----	±1% ----	±1% ----	83% Min.
RCB1100-24F	V1: +27.6V ±10% B+: +27.6V-----	24V	0A 0A	3.65A 0.5A	3.65A ----	240mVp-p ----	±1% ----	±1% ----	85% Min.

## Relay Contact Instructions (Max. 1A)

Relay contact is open circuit to ground when power source is normal;  
Relay contact is short circuit to ground when power source is failed (battery powered).

### CE Standards

EN 55032, EN 55035,  
EN 61000-3-2, EN 61000-3-3,  
(EN 61000-4-2, EN 61000-4-3,  
EN 61000-4-4, EN 61000-4-5,  
EN 61000-4-6, EN 61000-4-8,  
EN 61000-4-11)  
LVD: EN 62368-1

### Safety Standards

UL/CUL 60950 Meet  
 CE 60950 Marking

### Environments


**Operating Temperature** -15~ 50°C, Ambient  
**Operating Humidity** 20 ~ 90% RH, No Condensing  
**Storage Temperature** -20 ~ 85°C, Ambient  
**Vibration** 2G, 10~500Hz, 3 axes

- NOTE :**
1. Each output can provide up to maximum load, but total load can not exceed rated output power.
  2. Line regulation is measured from low line to high line at rated load.
  3. Load regulation is measured from 20% to 100% of rated load at 220VAC input.
  4. Ripple & Noise are measured with 20MHz oscilloscope at 220VAC by using a 20cm long 12" twisted pair-wire with a 0.1uF/630V metal capacitor & a 47uF electrolytic capacitor parallel on the test point.
  5. Efficiency is measured at rated load and 220VAC input.
  6. Hold-up time is measured at rated load and 220VAC input.
  7. Reign Power reserve the right to change specifications at any time without notice.



## Battery Charger Connection

### REIGN POWER'S BACKUP POWER SUPPLY

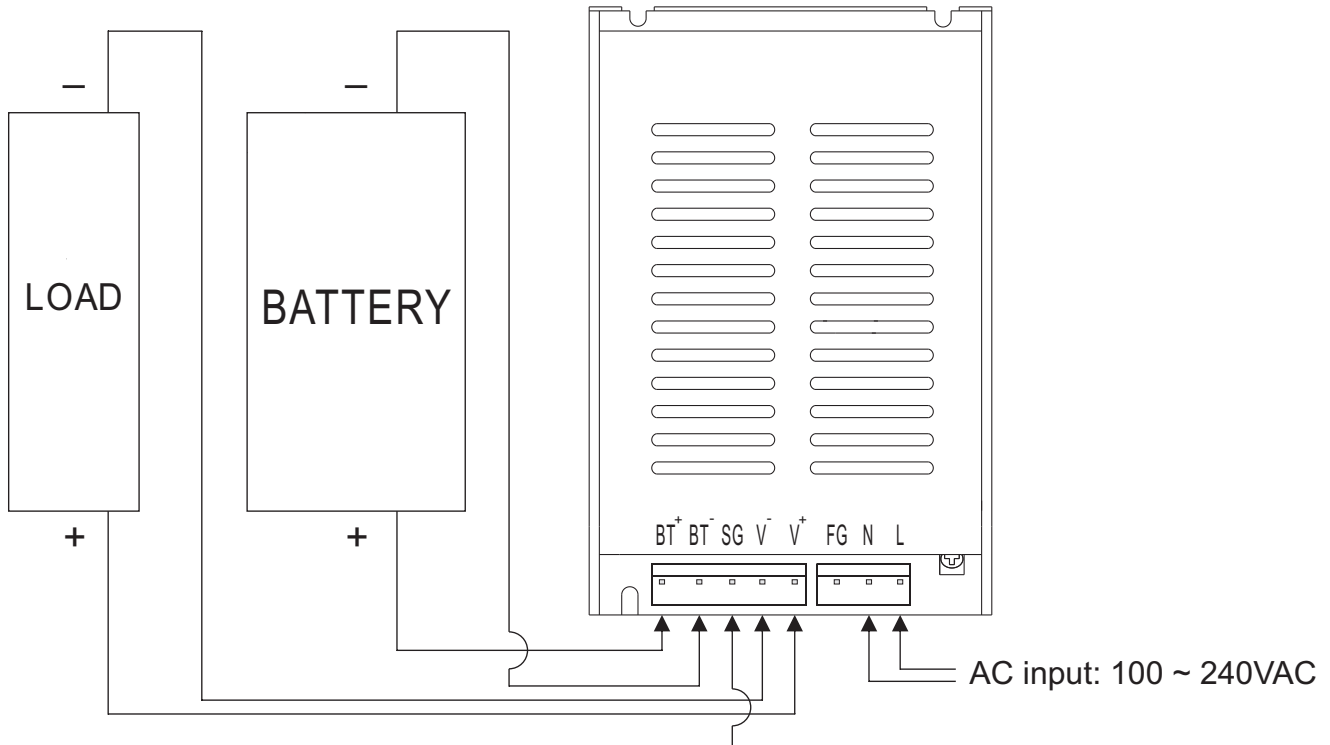

Power source normal: SG contact is open circuit to ground. Green LED on, Red LED off.  
 Power source failure (battery powered): SG contact is short circuit to ground. Green LED on, Red LED on.

## Panel Designation

Pin	Description
L	Line Terminal of Input
N	Neutral Terminal of Input
FG	Groud(Earth)
SG	Power Source Failure (battery powered) Terminal, Green LED on, Red LED on
V+	DC Output + Terminal
V-	DC Output - Terminal
BT+	DC Output Battery + Terminal
BT-	DC Output Battery - Terminal



## Output Voltage / Battery Charging and Discharging Curve

