



All the patents are held accountable counterfeiting.

Features



Green Power

- Standard/Din Rail Mounting Dual Purpose
- Easy mounting (one-step installation)
- Comply with High Efficiency Power 80Plus Criterion
- 92% High Efficiency
- Split rail & Series connection possible
- Fan cooling
- 100% burn-in test
- 2 years warranty
- Output modify range: 24V~48VDC

DIMENSIONS: 127.8(H)*78.7(D)*225(W)mm

WEIGHTS: 1750g

General specifications

INPUT

Input range 3 phase input 340~400VAC
 Input frequency 47~63Hz
 Max. I/P current / Inrush current (25°C) 8A/60A@380VAC
 Power factor 82% Min./380VAC

OUTPUT

Hold-up time 16ms/380VAC
 Short protection Re-power on to recover
 Over load protection Short-circuit protection

Detail specifications


2000 Watts

MODEL	O/P Volt Adj. ± %	Load(Current) 1			Ripple & Noise 4	Line REG. 2	Load REG. 3	Efficiency 5	O.V.P
		Min.	Rated	Max.					
LTP12K0D-24CENDA	V : +24V ±10%	0A	83.3A	83.3A	240mV	±1%	±1%	92% Ref.	28.8 ~ 33.6V
LTP12K0D-48CENDA	V : +48V ±10%	0A	41.6A	41.6A	480mV	±1%	±1%	92% Ref.	57.6 ~ 67.2V

Please Choose Fit Function, And Fill In The Blank With Suitable Words.

Order Model: LTP12K0D-24CEN□□

Optional Function:



CE Standards

EN 55032, EN 55035,
 EN 61000-3-2, EN 61000-3-3,
 (EN 61000-4-2, EN 61000-4-3,
 EN 61000-4-4, EN 61000-4-5,
 EN 61000-4-6, EN 61000-4-8,
 EN 61000-4-11)
 Heavy Industry level, criteria A
 LVD: EN 62368-1

Safety Standards

UL 508 Meet
 CE Meet

Environments

Operating Temperature -10 ~ 60°C, Ambient
 Operating Humidity 20 ~ 90% RH, No Condensing
 Storage Temperature -20 ~ 85°C, Ambient
 Vibration 2G, 10~500Hz, 3 axes


NOTE

1. Each output can provide up to maximum load, but total load can not exceed rated output power.
2. Line regulation is measured from low line to high line at rated load.
3. Load regulation is measured from 20% to 100% of rated load at 3 phase 380VAC input.
4. Ripple & Noise are measured with 20MHz oscilloscope at 3 phase 380VAC by using a 20cm long 12" twisted pair-wire with a 0.1uF/630V metal capacitor & a 47uF electrolytic capacitor parallel on the test point.
5. Efficiency is measured at rated load and 3 phase 380VAC input.
6. Hold-up time is measured at rated load and 3 phase 380VAC input.
7. Output Voltage Adjustable is measured on 5% of rated load.
8. The product uses metal enclosure for cooling. To ensure product lifespan, a clearance of at least 1 cm at the side of the product, 2 cm at top and bottom of the product should be maintained when installing.
9. Reign Power reserve the right to change specifications at any time without notice.



All the patents are held accountable counterfeiting.

Mechanical Details

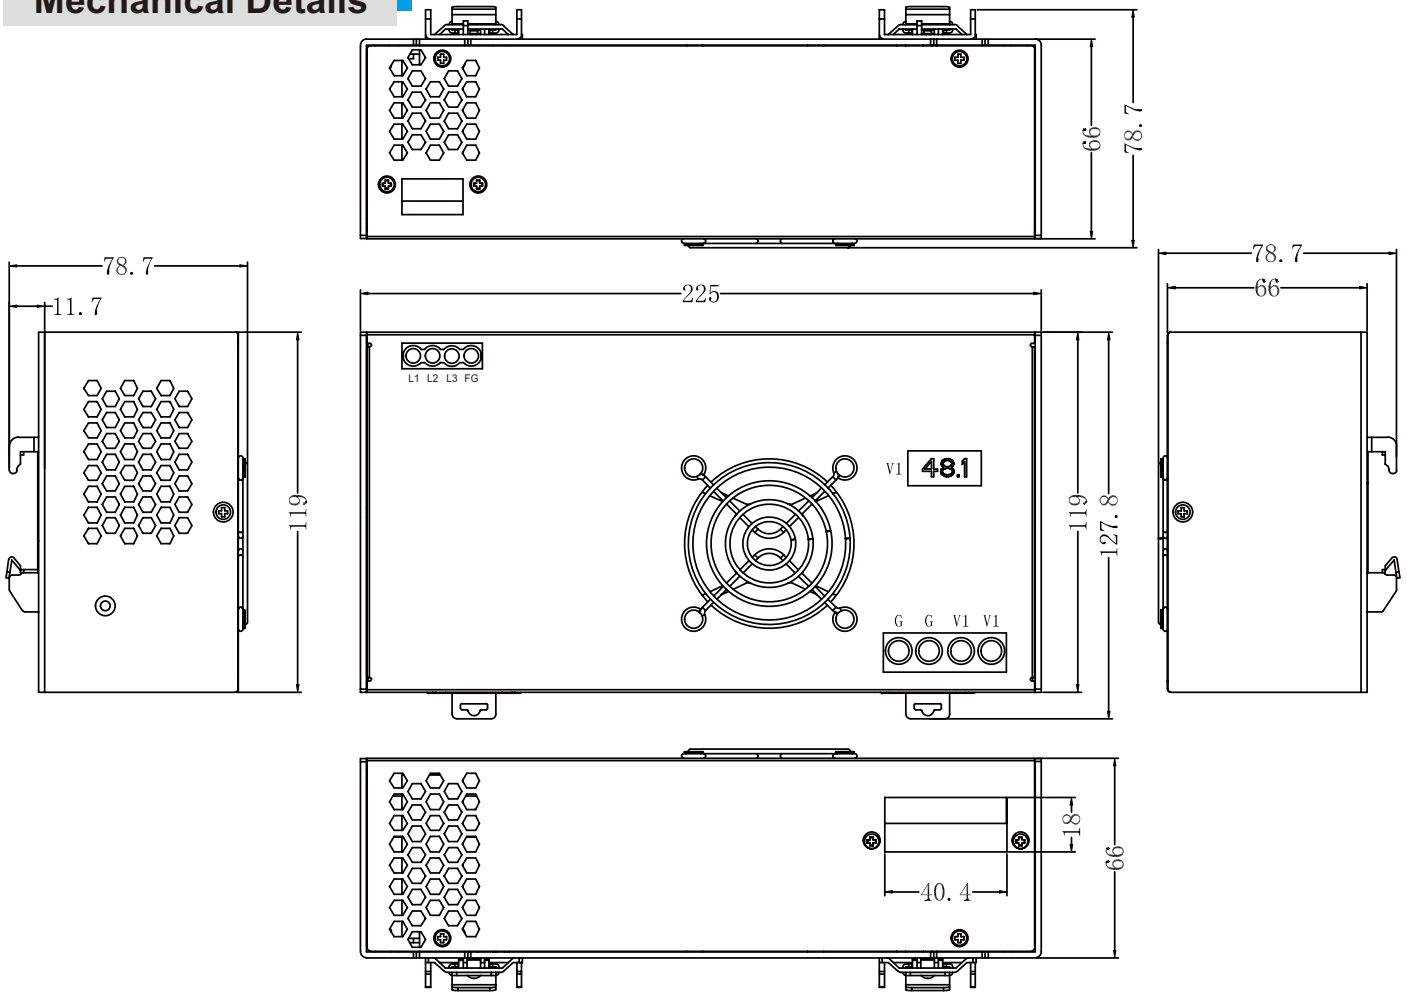

Panel Designation

CASE NO. : CS12K0D
 UNIT : mm
 DIMENSION : 127.8(H)*78.7(D)*225(W)
 MATERIAL : ALUMINUM
 COLOR : ORIGINAL ALUMINUM

Symbol	Description
L1~L3	Line Terminal Of AC Input
FG	Grounding (Earth)
V1	DC V1 Output Terminal
G	DC Output Grounding Terminal
OUTPUT MONITOR	Voltage Display